

PRODUCT INFORMATION

®Vinnolit P 70 F

Vinnolit P 70 F GreenVin® | Vinnolit P 70 F GreenVin® bio-attributed

Specialty product for organosols and plastisols


Brief Description

®Vinnolit P 70 F is an extremely fine-particle, homopolymer for special plastisols and organosol processing (lacquers).

Used in combination with solvents or plasticizers and the common additives, organosols or plastisols (see diagram) having low viscosities and good shelf life.

Coatings made of ®Vinnolit P 70 F exhibit minimal water absorption, no haze on exposure to water, highest clarity, high gloss and very good electrical and dielectric characteristics. Due to the extreme particle

fineness ®Vinnolit P 70 F is recommended for very thin coatings e.g. can and coil coatings.

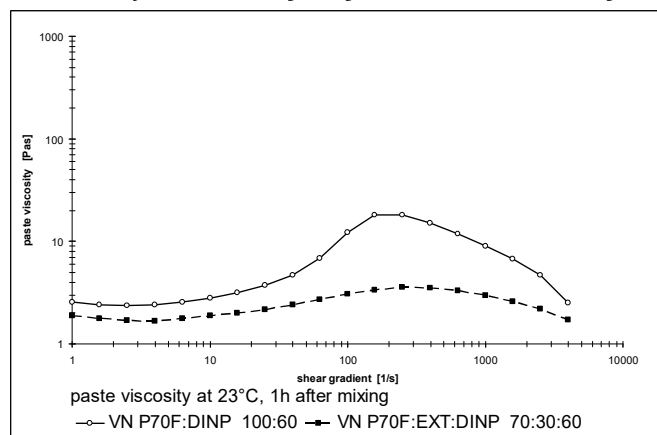

| RAW MATERIAL PROPERTIES | TYPICAL VALUE*) | UNIT | TEST METHOD | |
|---|-----------------|------|-------------|--------|
| | | | DIN EN ISO | ISO |
| K-value | 70 | - | 1628-2 | 1628-2 |
| Reduced viscosity | 124 | ml/g | 1628-2 | 1628-2 |
| Apparent bulk density | 0.340 | g/ml | 60 | 60 |
| Particle size distribution: sieve retention • retained on 0.063 mm screen | ≤ 0.4 | % | 1624 | 1624 |
| Volatile matter | ≤ 0.3 | % | - | - |
| Emulsifier content | extremely low | - | - | - |

*) The values given above are **typical** test results which should be used as a guide only. They do not form the whole or part of a specification or guarantee.

Processing and Application

®Vinnolit P 70 F is suitable for making organosols and plastisols. Organosol formulations made with ®Vinnolit P 70 F may be blended with "inactive" solvents (diluent), or with "active" solvents, swelling PVC. ®Vinnolit P 70 F can be easily dispersed in the liquid phase by intensive mixers.

Organosols and plastisols containing ®Vinnolit P 70 F may be applied readily by standard techniques, e.g. blade coating, reverse-roll coater, rotary screen printing, spraying, dipping, etc.

On account of its very fine particle size and narrow particle size distribution (average particle diameter around 2 µm), ®Vinnolit P 70 F is recommended for organosols and plastisols for very thin coatings. A typical application is coating of can interiors with protective layers of only 8 to 14 µm thickness.

Packaging, Delivery and Storage

The product is supplied in 25 kg bags.

®Vinnolit P 70 F should be stored dry and away from direct or indirect sources of heat. Please consult the safety data sheet for information about the safety precautions necessary for transport, storage, blending and processing.

Outstanding **properties** of ®Vinnolit P 70 F are:

- Very low paste viscosity at low shear rates
- Extraordinary high powder fineness, for very thin coatings
- Very good adhesion at textile fabrics
- Good compatibility with common adhesion promoter
- Extraordinary low water absorption
- Highest transparency and crystal clear films
- Glossy film surface
- Extraordinary good thermostability
- Good initial color

General Information

Further processing information and recommendations can be obtained from our Technical Service department.

Vinnolit P 70 F GreenVin® is produced with 100% renewable electricity (GOs). Additionally, renewable Ethylene is used for Vinnolit P 70 F GreenVin® bio-attributed. See GreenVin® info sheet.

The data and recommendations contained in this product information represent the current state of our knowledge and serve as a guide only to our products and their potential applications. Therefore, no warranty of specific properties of the products mentioned here in nor of their suitability or fitness for a particular purpose is implied.

The information given in this leaflet should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are also used.

Patent or other proprietary rights of third parties must be observed. The quality of our products is warranted under the terms of our General Conditions of Sale.

Ismaning, January 2023

Westlake Vinnolit GmbH & Co. KG

Carl-Zeiss-Ring 25

85737 Ismaning

Germany

Tel.: +49 (0)89 9 61 03-0

Fax: +49 (0)89 9 61 03-103

www.westlakevinnolit.com